

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 074 986 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:

03.11.2004 Bulletin 2004/45

(51) Int Cl.7: **G11B 17/04, G11B 17/22**

(21) Application number: **00116809.5**

(22) Date of filing: **03.08.2000**

(54) **Cartridge receiving apparatus and cartridge disc player utilizing the same**

Gerät zur Aufnahme von Kassetten und Kassettenspieler unter Verwendung desselben

Appareil de réception de cartouche et dispositif de lecture de cartouche à disque pourvu de cet appareil

(84) Designated Contracting States:
DE FR GB

(30) Priority: **06.08.1999 JP 22429899**

(43) Date of publication of application:
07.02.2001 Bulletin 2001/06

(73) Proprietor: **Pioneer Corporation**
Meguro-ku, Tokyo (JP)

(72) Inventors:

- **Onodera, Katsuhiko**
Hanazono 4-chome, Tokorozawa, Saitama (JP)
- **Ito, Hideo**
Hanazono 4-chome, Tokorozawa, Saitama (JP)

(74) Representative: **Vlering, Jentschura & Partner**
Postfach 22 14 43
80504 München (DE)

(56) References cited:
US-A- 5 790 507 **US-A- 5 802 038**

- **PATENT ABSTRACTS OF JAPAN vol. 1999, no. 11, 30 September 1999 (1999-09-30) -& JP 11 149687 A (MATSUSHITA ELECTRIC IND CO LTD), 2 June 1999 (1999-06-02)**
- **PATENT ABSTRACTS OF JAPAN vol. 012, no. 185 (P-710), 31 May 1988 (1988-05-31) -& JP 62 293558 A (CANON INC), 21 December 1987 (1987-12-21)**
- **PATENT ABSTRACTS OF JAPAN vol. 1996, no. 10, 31 October 1996 (1996-10-31) -& JP 08 147846 A (TOSHIBA CORP), 7 June 1996 (1996-06-07)**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 074 986 B1

Description

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] The present invention relates to a cartridge receiving apparatus according to the preamble of claim 1. Such an apparatus is for receiving cartridges into which record media such as a mini disc, a floppy disc, a VHD disc, a tape, a solid memory or the like are received, and to a cartridge disc player utilizing the cartridge receiving apparatus.

Description of the Related Art

[0002] There has conventionally been known a cartridge disc player in which a plurality of cartridge discs such as a mini disc are received and a desired one disc is selected from these discs to make record or reproduction. The cartridge disc player comprises a receiving unit for receiving the cartridge discs, a playback unit for making record or reproduction for the cartridge disc and a transfer unit for transferring the cartridge disc between the receiving unit and the playback unit.

[0003] The receiving unit is provided with a plurality of receiving spaces into which the cartridge discs are inserted manually by a user. When the receiving unit receives the cartridge discs, the transfer unit transfers the cartridge disc from the receiving unit to the playback unit so as to start the playback.

[0004] However, the insertion operation of the cartridge disc is manually carried out by the user, leading to a possible incomplete insertion. In the conventional cartridge disc player, there is no detection made as to whether the insertion of the cartridge is completed or not. Consequently, the transfer unit may operate in an incomplete receiving state and in such a case, the cartridge disc cannot be loaded, thus leading to a locking problem in the mechanical structure. The user may waste time.

[0005] There has conventionally been known a cartridge disc player in which a receipt detection switch for detecting the complete insertion of the disc cartridge is provided on each of the receiving spaces, in order to prevent the occurrence of such a problem. A plurality of receipt detection switches corresponding to the number of the cartridge discs are required, leading to complication of the entire structure.

[0006] JP(A) 11149687 and US-A-5790507 respectively disclose a device according to the preamble of claim 1.

[0007] From US-A-5802038 a recording medium drive apparatus including a detecting device for detecting the presence of recording media in a housing section of the apparatus is known.

[0008] From JP(A) 62293558 a device to prevent undesired wear of an engagement section by providing the

engagement section displaced to a position engaged with a shutter in response to the state of a detection section detecting the loading of a disk cassette provided is known.

SUMMARY OF THE INVENTION

[0009] An object of the present invention is therefore to provide an initially mentioned cartridge receiving apparatus in which there can be made a decision of the completed receipt of the cartridge with the use of a simple structure, and a cartridge disc player utilizing the cartridge receiving apparatus.

[0010] This is achieved by a cartridge receiving apparatus having the features in claim 1.

[0011] Advantageous further embodiments are described in the dependent claims.

[0012] According to the above-mentioned features of the present invention, the support unit for supporting the cartridge and the detection device for detecting the completed insertion of the cartridge are subjected to a combined use. Consequently, it is possible to reduce a number of structural elements in comparison with the conventional manner in which the support unit and the detection device are independently provided. Provision of a display device such as a lamp or the like for displaying whether the receipt of the cartridge has been completed or not, makes it possible to give warning of incomplete insertion to the user or the like, thus avoiding the waste of time due to the incomplete insertion. The cartridge may include record media such as a mini disc, a floppy disc, a VHD disc, a tape, a solid memory or the like. The detection device may include a switch, a sensor or the like.

[0013] The above-mentioned support unit may support said cartridge by fitting a part of said support unit into a hole formed on a shutter of said cartridge, and the position of said support unit may be changeable.

[0014] According to such features of the present invention, support of the cartridge by the support unit causes variation in position of the support unit so that the complete insertion state can be detected by means of the detection device.

[0015] The apparatus may further comprise at least one insertion detection device for detecting insertion of said cartridge into said receiving unit, a decision as whether receipt of said cartridge being completed or not is made in accordance with combination of detection results obtained by said insertion detection device and the detection results obtained by said detection device.

[0016] According to such features of the present invention, when the cartridge is inserted so that the insertion distance exceeds a prescribed value, the insertion detection device detects the insertion of the cartridge. When the insertion detection device detects the insertion, the cartridge is kept in any one of the incomplete and complete insertion states. When the detection device detects the complete insertion, there is made a de-

cision that the cartridge has been received completely. When the detection device does not detect the complete insertion, there is made a decision that the cartridge has been received incompletely. If the insertion detection device is not provided, it is impossible to distinguish the complete insertion state from the other state in which the cartridge has been inserted by a small insertion distance and then pulled out. In such a case, it is necessary to check the existence of the cartridge disc in accordance with the user's reproduction instructions for the cartridge disc, leading to a waste operation, even when the cartridge disc does not exist in the receiving space. The insertion detection device may include a switch, a sensor or the like.

[0017] There may be adopted a structure that said at least one cartridge comprises a plurality of cartridges and said receiving unit has a plurality of receiving spaces into which said plurality of cartridges can be received respectively; said at least one insertion detection device comprises a plurality of insertion detection devices that are provided for the respective receiving spaces; said at least one support unit comprises a plurality of support units that are provided for the respective receiving spaces; and said detection device is provided for said plurality of support units. The detection device detects the complete insertion of all the cartridges. A decision of existence of the cartridge that is received incompletely in the whole receiving unit as well as a decision of complete receipt of the cartridge in each of the receiving spaces are made on the basis of the detection results obtained by the detection device and the detection results obtained by the insertion detection devices provided for the respective receiving spaces.

[0018] According to the present invention, the single detection device is provided for the plurality of support units and there is made a decision of incomplete or complete receipt of the cartridge. It is therefore possible to reduce a number of structural elements in comparison with the conventional manner in which the detection devices are provided for the respective receiving spaces and a decision of incomplete or complete receipt of the cartridge is made for the respective receiving spaces.

[0019] The other cartridge receiving apparatus of the present invention comprises: a receiving unit for receiving at least one cartridge; at least one leaf spring a part of which is fitted into a hole formed on a shutter of said cartridge to support said cartridge; a lever, which is moved by resilient deformation of said leaf spring; and a detection device for detecting a position of said lever, a decision as whether receipt of said cartridge is completed or not being made in accordance with detection results obtained by said detection device.

[0020] According to the features of the present invention, the leaf spring for supporting the cartridge serves as a part of the detection device for detecting the complete insertion of the cartridge, thus reducing a number of structural elements.

[0021] There may be adopted a structure that said at

least one cartridge comprises a plurality of cartridges and said receiving unit has a plurality of receiving spaces into which said plurality of cartridges can be received respectively; said at least one leaf spring comprises a plurality of leaf springs that are provided for the respective receiving spaces; said lever is provided for said plurality of leaf springs so that resilient deformation of at least one of said plurality of leaf springs causes said lever to move.

[0022] According to such features of the present invention, the single lever is provided for the plurality of leaf springs, which can resiliently be deformed independently, and the detection device detects the position of the lever so that a decision of the complete or incomplete receipt of the cartridge is made. It is therefore possible to reduce a number of structural elements in comparison with the conventional manner in which the detection devices are provided for the respective receiving spaces and a decision of incomplete or complete receipt of the cartridge is made for the respective receiving spaces.

[0023] A cartridge disc player of the present invention, comprises: a receiving unit for receiving at least one cartridge; at least one support unit for supporting said cartridge received; and a detection device for detecting a position of said support unit; and a transfer unit for transfer said cartridge between said receiving unit and a playback unit, a decision as whether receipt of said cartridge is completed or not being made in accordance with detection results obtained by said detection device, and said cartridge having a shutter that is closed by said support unit when said cartridge is transferred from said playback unit to said receiving unit.

[0024] According to the features of the present invention, the support unit for supporting the cartridge and the detection device for detecting the complete insertion of the cartridge are subjected to a combined use, thus reducing a number of structural elements.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025]

FIG. 1 is a perspective view illustrating a cartridge disc player of the first embodiment of the present invention;

FIG. 2 is a perspective view illustrating the state in which a transfer unit is removed from the disc player as shown in FIG. 1;

FIG. 3 is a perspective view illustrating a mini disc;

FIG. 4 is a perspective view illustrating a receiving unit of the cartridge;

FIG. 5 is a perspective view illustrating a leaf spring serving as a support unit;

FIG. 6(a) is a plan view illustrating the state of the leaf spring and the switch lever during insertion of the disc, and FIG. 6(b) is a plan view illustrating the state of them after the completion of insertion;

FIG. 7 is a perspective view illustrating an insertion detection switch and the adjacent elements; and

FIG. 8(a) is a plan view illustrating the disc during returning operation of the disc from the playback unit to the receiving unit and FIG. 8(b) is a plan view illustrating the disc after the completion of the returning operation of the disc.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0026] Now, embodiments of a cartridge receiving apparatus of the present invention will be described in detail below with reference to the accompanying drawings.

[0027] FIGS. 1 and 2 are perspective views illustrating an embodiment of the cartridge disc player into which the cartridge receiving apparatus is incorporated. The cartridge disc player is used as a player for mini discs or the like. The cartridge disc player comprises a base unit 1, a cartridge receiving unit 2 for receiving a plurality of cartridges, for example, three cartridges (hereinafter referred to as the "receiving unit"), a playback unit 3 having a pickup 3b and a turntable 3a and a transfer unit 4 for transferring the cartridge disc (hereinafter referred to as the "disc") received in the receiving unit 2 to the playback unit 3. FIG. 1 illustrates the cartridge disc player into which the base unit 1, the receiving unit 2, the playback unit 3 and the transfer unit 4 are assembled. FIG. 2 illustrates the state in which the transfer unit 4 is removed from the assembled units to show the playback unit 3 locating below the transfer unit 4.

[0028] The entire operation of the cartridge disc player will be described. The operations after the insertion of disc before the reproduction of information recorded on the disc will be described in time sequence.

① With respect to the ejection operation, the receiving unit 2 is moved forward relative to the base unit 1. The receiving unit 2 comes into contact with a front cover pivoted on an audio equipment to open the front cover, along with the movement of the receiving unit 2. In this state, a plurality of discs are received in the receiving unit 2 by an insertion operation of a user. The structure of the receiving unit 2 will be described later.

② After the disc is inserted in the receiving unit 2, the receiving unit 2 moves rearward relative to the base unit 1. The front cover of the audio equipment closes along with the rearward movement of the receiving unit 2.

③ With respect to the selection operation, the transfer unit 4 moves upward to the position of the disc received in accordance with the user's instructions. The transfer unit 4 moves up, while keeping a parallel state with the base unit 1 so as to reach the position of the disc. FIG. 1 illustrates a state in which the transfer unit 4 is placed in the lowermost position.

④ With respect to the disc-loading operation, the transfer lever 4a of the transfer unit 4 engages with the disc and the disc is withdrawn in the inside. The shutter opens during the withdrawing operation of the disc so that a part of the disc is exposed. The structure of the disc will be described later.

⑤ The transfer unit 4 moves downward and the mini disc is placed on the turntable 3a of the playback unit 3 (see FIG. 2).

⑥ Then, the turntable 3a of the playback unit 3 turns and the pickup 3 moves in the diametrical direction of the disc to carry out the reproduction or record of information recorded on the disc.

[0029] Now, description will be given below of an operation of discharging the disc after the completion of reproduction of information.

① The transfer unit 6 moves upward to the original position in which the disc has been received.

② The drive of the transfer lever 4a causes the disc to move forward to return the disc to the receiving unit 2. The shutter of the disc closes in the receiving unit 2.

③ The transfer unit 4 moves downward to return the original position.

④ The receiving unit 2 moves forward relative to the base unit 1 and an ejection operation is carried out again. The above-described front cover opens and the user pulls out the disc in which the playback has been completed.

[0030] FIG. 3 is a perspective view illustrating the disc that is received in the receiving unit 2. The disc 5 is composed of a disc body and a cartridge in which the disc body is received, in the conventional manner. The disc 5 has the shutter 6, which is openable to expose the disc body. When the playback operation is carried out, the shutter 6 opens to reproduce information recorded on the disc body. The cartridge is provided with a shutter-engaging portion 5a, which engages with the shutter 6. The engagement state ensures the closing condition of the shutter 6. When the shutter 6 is opened, the engagement of the shutter-engaging portion 5a is released. The

shutter 6 has on its side surface a shutter-hole 7 having a rectangular shape.

[0031] FIG. 4 is a perspective view illustrating the receiving unit 2. The receiving unit 2 comprises the receiving unit 8 having three receiving spaces in the vertical direction, the leaf spring 9 serving as the support unit for supporting the cartridge received in the receiving unit 8, the switch lever 10, which is swingable by the resilient deformation of the leaf spring 9 and the complete receipt detection switch 11 serving as the detection device for detecting the position of the switch lever 10.

[0032] The receiving unit 8 is composed of a receiving unit body 8b and a front inlet 8a that is secured on the front end of the receiving unit body 8b. The front inlet 8a has three slots 12. These slots 12 have tapered portions for easy insertion of the disc. The receiving unit body 8b is provided on the opposite inner side surfaces with guide rails 13 for guiding the disc (see FIGS. 5 and 7). The user inserts the disc 5 from the slot 12 so that the disc 5 is guided along the guide rails 13 to move in the inside of the receiving unit body 8 as shown in FIG. 4.

[0033] The leaf spring 9 engages with the shutter-hole 7 of the disc 5 to support the disc 5. The leaf spring 9 is provided on the outer side surface of the receiving unit body 8b as shown in FIG. 5. The leaf spring 9 has a projection portion 9a having an L-shape, which projects from a leaf spring-opening 14 formed on the side surface of the guide rail 13 into the receiving space. The leaf spring 9 has the rear end, which is fixed to the receiving unit body 8b and the other free end. The leaf spring 9 is composed of three spring portions corresponding to the receiving spaces for the disc 5. The three spring portions can resiliently be deformed independently.

[0034] When the user inserts the disc 5, the projection portion 9a of the leaf spring 9 comes into contact with the disc 5 so that the leaf spring 9 is resiliently deformed. Further insertion of the disc 5 causes the projection portion 9a of the leaf spring 9 to be fitted into the shutter-hole so that the leaf spring 9 returns in the original state. In such a state, the receipt of the disc 5 is completed. After the completion of receipt of the disc 5, a positional restriction lever 15 extending so as to bar the rear end of the receiving unit body 8b restricts the further insertion of the disc 5 (see FIG. 1).

[0035] As shown in FIG. 4, the switch lever 10 swings by the elastic deformation of the leaf spring 9 to push the complete receipt detection switch 11. The switch lever 10 is mounted on the receiving unit body 8b so as to be swingable. The switch lever 10 has three engaging portions 17, which can come into contact with the leaf spring 9. A coil spring 18 presses the engaging portions 17 on the leaf spring 9. The resilient deformation of the leaf spring 9 causes the switch lever 10 to swing during the insertion operation of the disc 5 as shown in FIG. 6 (a), resulting in the maintenance of "ON" state of the complete receipt detection switch 11. When the leaf spring is fitted into the shutter-hole 7 of the cartridge after completion of receipt of the disc 5, the leaf spring 9

returns in the original state. Accordingly, the switch lever 10 swings in its original state, resulting in the maintenance of "OFF" state of the complete receipt detection switch 11. The leaf spring 9 has not only the function of supporting the disc 5, but also the function of swinging the switch lever 10.

[0036] The complete receipt detection switch 11 serving as the detection device for detecting the position of the switch lever 10 provides the "ON" state when the leaf spring 9 is deformed, and the "OFF" state when it returns in the original state. More specifically, the complete receipt detection switch 11 provides the "ON" state during the insertion operation of the disc 5 and the "OFF" state when the disc is inserted completely or not inserted. The single switch lever 10 and the single complete receipt detection switch 11 are provided for the three leaf springs 9. Resilient deformation of any one of the leaf springs 9 causes the "ON" state of the complete receipt detection switch 11.

[0037] FIG. 7 is a perspective view illustrating the other side surface opposite to the side surface onto which the leaf springs 9 are provided. Insertion detection leaf springs 19 are provided on the above-mentioned other side surface integrally with the guide rails 13. Insertion detection switches serving as the insertion detection device are provided on the opposite surfaces of the insertion detection leaf springs 19. Insertion of the disc 5 causes the insertion detection leaf springs 19 to be elastically deformed to provide the "ON" state of the insertion detection switch. In the "ON" state of the insertion detection switch, the disc 5 is inserted completely or incompletely. The three insertion detection switches are provided in accordance with the number of the receiving spaces.

[0038] The complete receipt lamps serving as the display device, which are provided for the respective slots 12, light up on the basis of the detection results obtained by the complete receipt detection switch 11 and the insertion detection switch. More specifically, the lamp lights up only when the disc 5 is completely received in the respective slots, thus causing the user to recognize the complete insertion of the disc. Lighting of the lamp causes the user to recognize the incomplete insertion of the disc, thus reducing any useless operation of the cartridge player due to the incomplete insertion of the disc. The lamp does not light up when no disc is inserted. When the insertion is incomplete (i.e., in the incomplete receipt state), a visible warning or a sound alarm is given.

[0039] Description will be given below of relationship between the combination of the detection results obtained by the complete receipt detection switch 11 and the detection results obtained by the insertion detection switch, on the one hand, and the lamp display, on the other hand. Insertion of the disc 5 even by a small insertion distance causes the insertion detection switch to turn into "ON" state. In the "ON" state of the insertion detection switch, the disc 5 is accordingly inserted in a

complete or incomplete manner. If the complete receipt detection switch 11 is "OFF", there is made a decision that insertion is complete for all the slots in which the insertion detection switches are "ON", and the lamps for the respective slots light up. If the complete receipt detection switch 11 is "ON", there is made a decision that insertion is incomplete for at least one of the slots in which the insertion detection switches are "ON", and any lamp does not light up. The slot in which the insertion detection switch is "OFF" indicates the slot into which no disc 5 is inserted. If the insertion detection device is not provided and only the complete receipt detection switch 11 exists, it is impossible to distinguish the complete insertion state from the other state in which the cartridge has been inserted by a small insertion distance and then pulled out. In such a case, it is necessary to check the existence of the cartridge disc in accordance with the user's reproduction instructions for the cartridge disc, leading to a waste operation, even when the cartridge disc does not exist in the receiving space.

[0040] The transfer unit 4 transfers the disc 5 to the playback unit 3 after the completion of receipt of the disc 5, to start the playback operation for the disc 5 as mentioned above. FIG. 8 illustrates the disc 5, which is returned from the playback unit 3 to the receiving unit 2 by means of the transfer unit 4 after the completion of the playback operation. In the playback unit 3, the reading of information recorded on the disc 5 is carried out, keeping the shutter opened. The transfer unit 4 returns the disc 5 with the shutter opened to the receiving unit 2. In this case, the disc 5 moves forward from the rear portion of the transfer unit 2 as shown in FIG. 8(a). The projection portion 9a of the leaf spring 9 is fitted into the shutter-hole 7 during the forward movement of the disc 5. The further forward movement of the disc 5 causes the shutter 6 to close gradually and the shutter 6 is finally closed completely (see FIG. 8(b)). The leaf springs 9 have functions of (i) supporting the disc 5, (ii) detecting the complete insertion of the disc 5 and (iii) closing the shutter of the disc 5, thus making it possible to reduce a number of structural elements.

[0041] According to the present invention as described in detail, the cartridge receiving apparatus of the present invention comprises a receiving unit for receiving at least one cartridge; at least one support unit for supporting said cartridge received; and a detection device for detecting a position of said support unit, a decision as whether receipt of said cartridge is completed or not being made in accordance with detection results obtained by said detection device. According to the above-mentioned features of the present invention, the support unit for supporting the cartridge and the detection device for detecting the completed insertion of the cartridge are subjected to a combined use. Consequently, it is possible to reduce a number of structural elements in comparison with the conventional manner in which the support unit and the detection device are independently provided. Provision of a display device

such as a lamp or the like for displaying whether the receipt of the cartridge has been completed or not, makes it possible to give warning of incomplete insertion to the user or the like, thus avoiding the waste of time due to the incomplete insertion.

Claims

1. A cartridge receiving apparatus, comprising:

a receiving unit (8) for receiving at least one cartridge (5);
one or more support unit/s (9) for supporting said cartridge (5) received, said support unit/s (9) having one end and another end; and
a first detection device (11) for detecting a position of said support unit/s (9);
a decision as to whether receipt of said cartridge (5) is completed or not being made in accordance with detection results obtained by said first detection device (11).

characterized in that:

each support unit comprises a leaf spring said one end of each leaf spring (9) is fixed on said receiving unit (8);
said other end of each leaf spring (9) is movable in a direction substantially perpendicular to an insertion direction of said cartridge (5), a part of each leaf spring (9) being adapted to be fitted into a hole formed on a shutter of said cartridge to support stationarily said cartridge in a receipt completion state; and
said first detection device (11) detects a position of said other end of each leaf spring (9) through a movable single member (10) for connecting the other end of the leaf spring (9) to the first detection device (11).

2. The apparatus as claimed in Claim 1, wherein:

said support unit (9) can support said cartridge (5) by fitting a part of said support unit (9) into a hole formed on a shutter of said cartridge (5), and the position of said support unit (9) is changeable.

3. The apparatus as claimed in Claim 1 or 2, further comprising:

at least one second detection device for detecting insertion of said cartridge (5) into said receiving unit (8), a decision as whether receipt of said cartridge (5) being completed or not is made in accordance with combination of detection results obtained by said second detection

device and the detection results obtained by said first detection device (11).

4. The apparatus as claimed in Claim 3, wherein:

said at least one cartridge (5) comprises a plurality of cartridges and said receiving unit (8) has a plurality of receiving spaces into which said plurality of cartridges can be received respectively;
said at least one second detection device comprises a plurality of second detection devices that are provided for the respective receiving spaces;
said at least one support unit (9) comprises a plurality of support units that are provided for the respective receiving spaces; and
said first detection device (11) is provided for said plurality of support units.

5. The apparatus, as claimed in Claim 1, characterized in that:

the member (10) is a lever, which is moved by resilient deformation of said leaf spring; and
said first detection device (11) detects a position of said lever to detect said other end of each support unit (9).

6. The apparatus as claimed in Claim 5, wherein:

said at least one cartridge (5) comprises a plurality of cartridges and said receiving unit (8) has a plurality of receiving spaces into which said plurality of cartridges can be received respectively;
said at least one leaf spring comprises a plurality of leaf springs that are provided for the respective receiving spaces;
said lever (10) is provided for said plurality of leaf springs so that resilient deformation of at least one of said plurality of leaf springs causes said lever (10) to move.

7. A cartridge disc player, comprising:

a cartridge receiving apparatus according to claim 1;
a transfer unit for transfer said cartridge (5) between said receiving unit (8) and a playback unit; and
said cartridge (5) having a shutter that is closed by said support unit (9) when said cartridge (5) is transferred from said playback unit to said receiving unit (8).

Patentansprüche

1. Kassetten-Aufnahmevorrichtung, aufweisend:

eine Aufnehmeeinheit (8) zum Aufnehmen wenigstens einer Kassette (5);
eine oder mehrere Halteeinheit(en) (9) zum Halten der aufgenommenen Kassette (5), wobei die Halteeinheit(en) (9) ein Ende und ein anderes Ende aufweisen; und
eine erste Detektionsvorrichtung (11) zum Detektieren einer Position der Halteeinheit(en) (9); wobei
eine Entscheidung, ob die Aufnahme der Kassette (5) abgeschlossen ist oder nicht, gemäß Detektionsergebnissen getroffen wird, die von der Detektionsvorrichtung (11) erzielt werden,

dadurch gekennzeichnet, dass:

jede Halteeinheit eine Blattfeder aufweist, wobei das eine Ende jeder Blattfeder (9) an der Aufnehmeeinheit (8) befestigt ist;
das andere Ende jeder Blattfeder (9) in einer Richtung bewegbar ist, die im Wesentlichen senkrecht zu einer Einführ-Richtung der Kassette (5) ist, wobei ein Teil jeder Blattfeder (9) derart eingerichtet ist, dass er in ein Loch passt, das in einem Verschlussenteil der Kassette ausgebildet ist, um so die Kassette in einem Aufnahme-Vervollständigungszustand stationär zu halten; und
die erste Detektionsvorrichtung (11) durch ein bewegbares einzelnes Teil (10) zum Verbinden des anderen Endes der Blattfeder (9) mit der ersten Detektionsvorrichtung (11) eine Position des anderen Endes jeder Blattfeder (9) detektiert.

2. Vorrichtung gemäß Anspruch 1, wobei:

die Halteeinheit (9) die Kassette (5) durch Einpassen eines Teils der Halteeinheit (9) in ein Loch, das in einem Verschlussenteil der Kassette (5) gebildet ist, halten kann, und die Position der Halteeinheit (9) änderbar ist.

3. Vorrichtung gemäß Anspruch 1 oder 2, ferner aufweisend:

wenigstens eine zweite Detektionsvorrichtung zum Detektieren der Einführung der Kassette (5) in die Aufnehmeeinheit (8), wobei eine Entscheidung, ob die Aufnahme der Kassette (5) abgeschlossen ist oder nicht, gemäß einer Kombination von Detektionsergebnissen, die von der zweiten Detektionsvorrichtung erzielt sind, und den Detektionsergebnissen, die von

der ersten Detektionsvorrichtung (11) erzielt sind, getroffen wird.

4. Vorrichtung gemäß Anspruch 3, wobei:

die wenigstens eine Kassette (5) eine Mehrzahl von Kassetten aufweist und die Aufnehmeeinheit (8) eine Mehrzahl von Aufnahme-Räumen aufweist, in denen die Mehrzahl von Kassetten jeweils aufgenommen werden kann;
die wenigstens eine zweite Detektionsvorrichtung eine Mehrzahl von zweiten Detektionsvorrichtungen aufweist, die für die jeweiligen Aufnahme-Räume vorgesehen sind;
die wenigstens eine Halteeinheit (9) eine Mehrzahl von Halteeinheiten aufweist, die für die jeweiligen Aufnahme-Räume vorgesehen sind; und die erste Detektionsvorrichtung (11) für die Mehrzahl von Halteeinheiten vorgesehen ist.

5. Vorrichtung gemäß Anspruch 1, **dadurch gekennzeichnet, dass:**

das Teil (10) ein Hebel ist, der durch eine elastische Deformation der Blattfeder bewegt wird; und
die erste Detektionsvorrichtung (11) zum Detektieren des anderen Endes jeder Halteeinheit (9) eine Position des Hebels detektiert.

6. Vorrichtung gemäß Anspruch 5, wobei:

die wenigstens eine Kassette (5) eine Mehrzahl von Kassetten aufweist und die Aufnehmeeinheit (8) eine Mehrzahl von Aufnahme-Räumen aufweist, in denen die Mehrzahl von Kassetten jeweils aufgenommen werden kann;
die wenigstens eine Blattfeder eine Mehrzahl von Blattfedern aufweist, die für die jeweiligen Aufnahme-Räumen vorgesehen sind;
der Hebel (10) für die Mehrzahl von Blattfedern vorgesehen ist, so dass eine elastische Deformation von wenigstens einer der Mehrzahl von Blattfedern bewirkt, dass sich der Hebel (10) bewegt.

7. Kassetten-Disk-Abspielgerät, aufweisend:

eine Kassetten-Aufnahmevorrichtung gemäß Anspruch 1;
eine Transporteinheit zum Transportieren der Kassette (5) zwischen der Aufnehmeeinheit (8) und einer Abspiel-Einheit; wobei
die Kassette (5) ein Verschlussstück aufweist, das von der Halteeinheit (9) geschlossen wird, wenn die Kassette (5) von der Abspiel-Einheit zu der Aufnehmeeinheit (8) transportiert wird.

Revendications

1. Appareil de réception de cartouche, comprenant :

une unité de réception (8) pour recevoir au moins une cartouche (5) ;
une ou plusieurs unités de support (9) pour supporter ladite cartouche (5) reçue, lesdites unités de support (9) comportant une première extrémité et une autre extrémité ; et
un premier dispositif de détection (11) pour détecter une position desdites unités de support (9) ;
une décision quant à l'achèvement ou non de la réception de ladite cartouche (5) étant prise conformément à des résultats de détection obtenus par ledit dispositif de détection (11),

caractérisé en ce que :

chaque unité de support comprend un ressort à lame, ladite première extrémité de chaque ressort à lame (9) est fixée sur ladite unité de réception (8) ;
ladite autre extrémité de chaque ressort à lame (9) est mobile dans une direction sensiblement perpendiculaire à une direction d'insertion de ladite cartouche (5), une partie de chaque ressort à lame (9) étant adaptée pour être insérée dans un trou formé sur un obturateur de ladite cartouche afin de supporter fixement ladite cartouche dans un état d'achèvement de réception ; et
ledit premier dispositif de détection (11) détecte une position de ladite autre extrémité de chaque ressort à lame (9) par l'intermédiaire d'un élément mobile unique (10) pour raccorder l'autre extrémité du ressort à lame (9) au premier dispositif de détection (11).

2. Appareil selon la revendication 1, dans lequel :

ladite unité de support (9) peut supporter ladite cartouche (5) en insérant une partie de ladite unité de support (9) dans un trou formé sur un obturateur de ladite cartouche (5), et la position de ladite unité de support (9) peut être modifiée.

3. Appareil selon la revendication 1 ou 2, comprenant en outre :

au moins un deuxième dispositif de détection pour détecter l'insertion de ladite cartouche (5) dans ladite unité de réception (8), une décision quant à l'achèvement ou non de la réception de ladite cartouche (5) étant prise conformément à une combinaison de résultats de détection

obtenus par ledit deuxième dispositif de détection et des résultats de détection obtenus par ledit premier dispositif de détection (11).

qui est fermé par ladite unité de support (9) lorsque ladite cartouche (5) est transférée de ladite unité de lecture à ladite unité de réception (8).

4. Appareil selon la revendication 3, dans lequel : 5

ladite au moins une cartouche (5) comprend une pluralité de cartouches et ladite unité de réception (8) comporte une pluralité d'espaces de réception dans lesquels ladite pluralité de 10
cartouches peuvent être respectivement reçues ;

ledit au moins un deuxième dispositif de détection comprend une pluralité de deuxième dispositifs de détection qui sont prévus pour les 15
espaces de réception respectifs ;

ladite au moins une unité de support (9) comprend une pluralité d'unités de support qui sont prévues pour les espaces de réception 20
respectifs ; et

ledit premier dispositif de détection (11) est prévu pour ladite pluralité d'unités de support.

5. Appareil selon la revendication 1, caractérisé en 25
ce que :

l'élément (10) est un levier, qui est déplacé par une déformation élastique dudit ressort à 30
lame ; et

ledit premier dispositif de détection (11) détecte 30
une position dudit levier pour détecter ladite autre extrémité de chaque unité de support (9).

6. Appareil selon la revendication 5, dans lequel : 35
35

ladite au moins une cartouche (5) comprend une pluralité de cartouches et ladite unité de réception (8) comporte une pluralité d'espaces de réception dans lesquels ladite pluralité de 40
cartouches peuvent être respectivement reçues ;

ledit au moins un ressort à lame comprend une pluralité de ressorts à lame qui sont prévus pour les espaces de réception respectifs ;

ledit levier (10) est prévu pour ladite pluralité de 45
ressorts à lame de sorte qu'une déformation élastique d'au moins l'un de ladite pluralité de ressorts à lame provoque le déplacement dudit 50
levier (10).

7. Lecteur de disque à cartouche, comprenant : 55

un appareil de réception de cartouche selon la revendication 1 ;

une unité de transfert pour transférer ladite car- 55
touche (5) entre ladite unité de réception (8) et une unité de lecture ; et

ladite cartouche (5) comportant un obturateur

FIG. 1

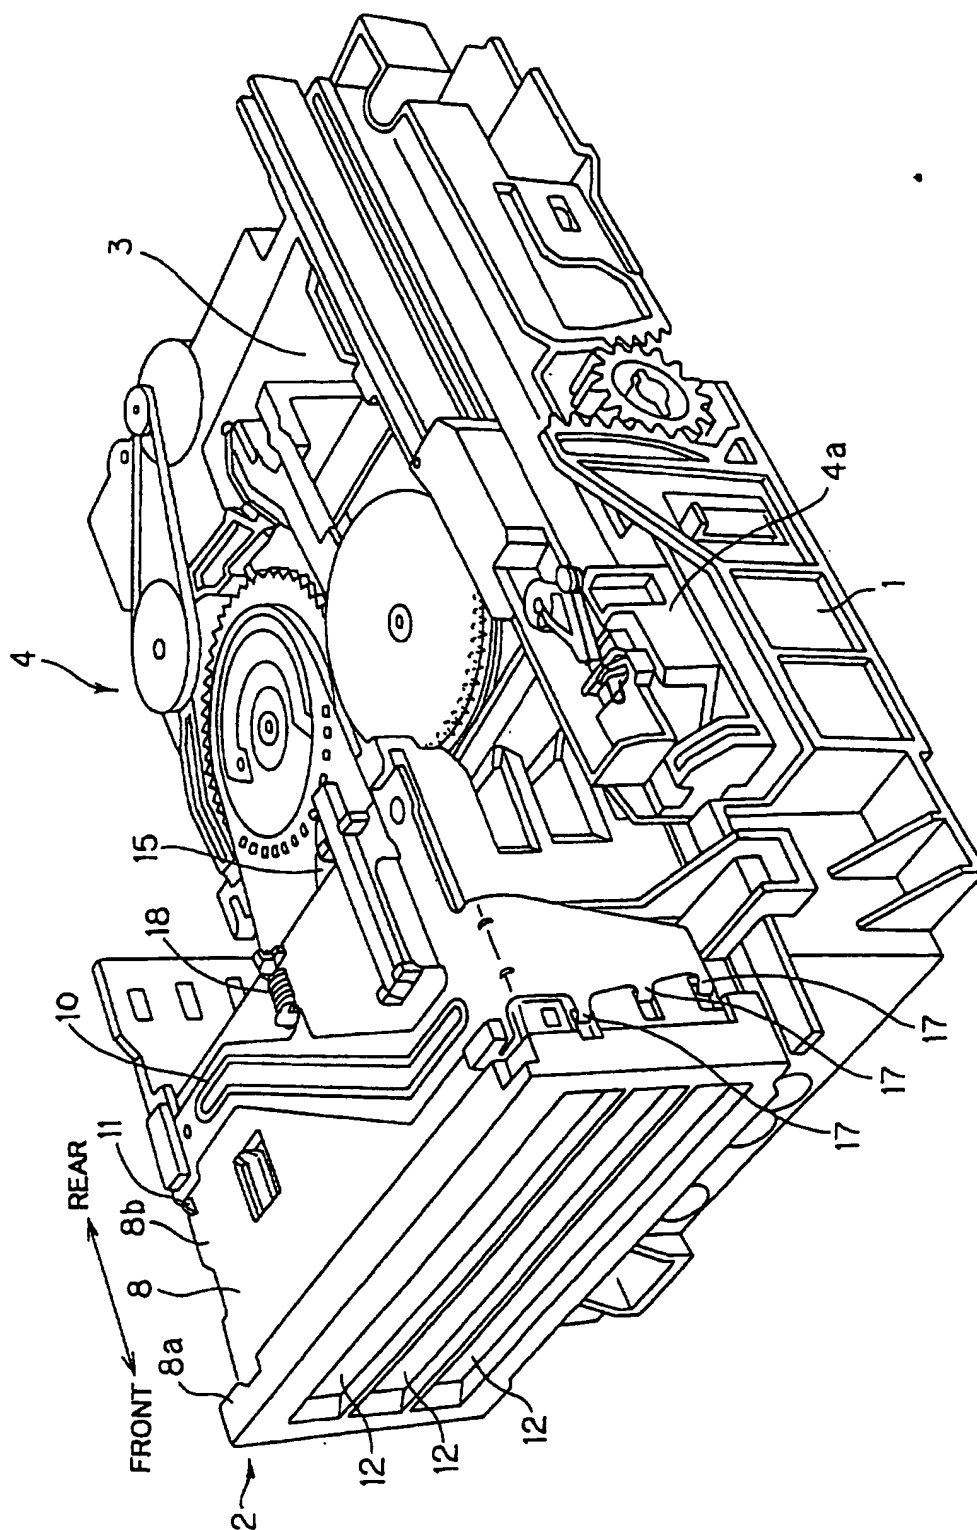


FIG. 2

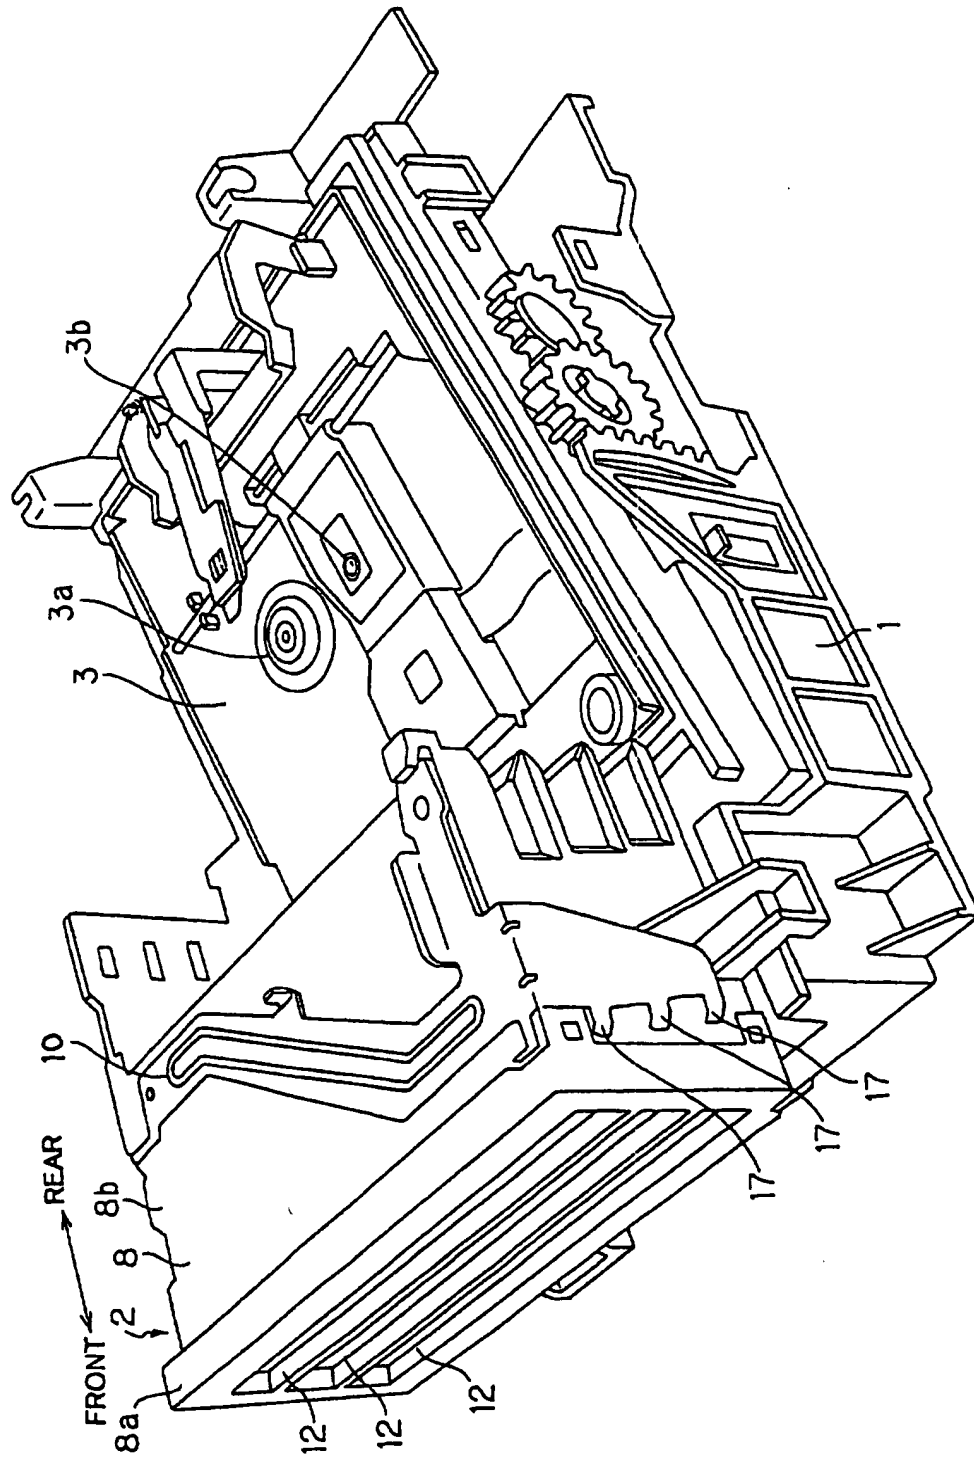


FIG. 3

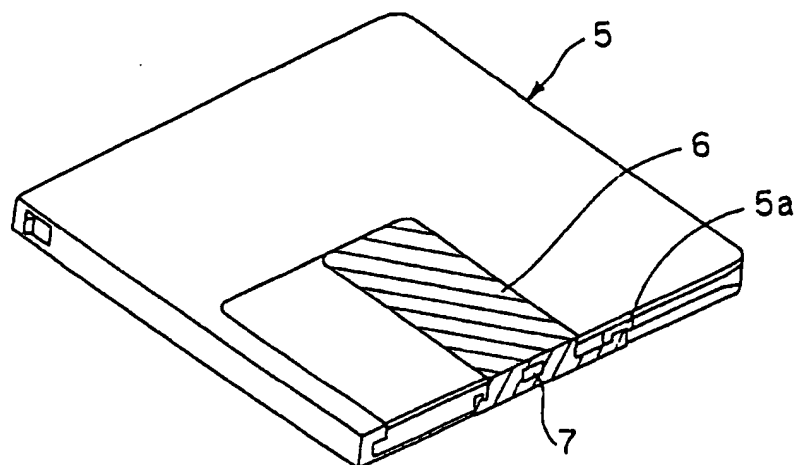


FIG. 4

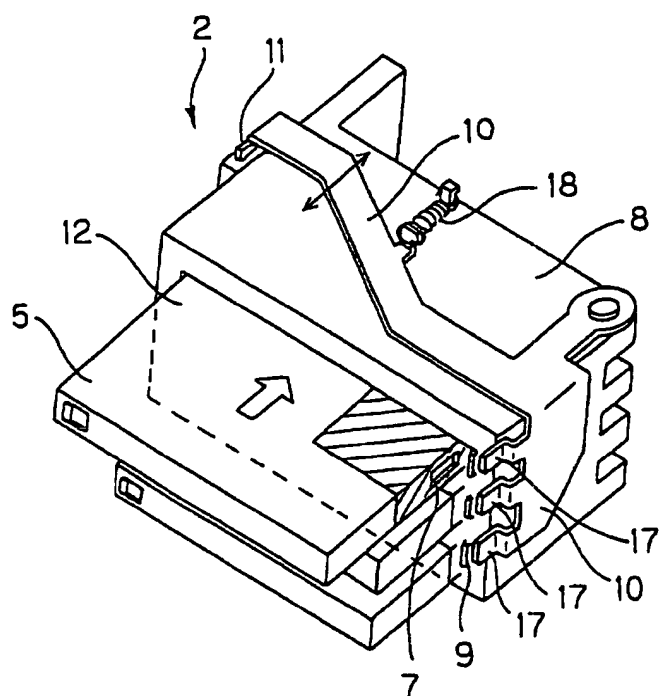


FIG. 5

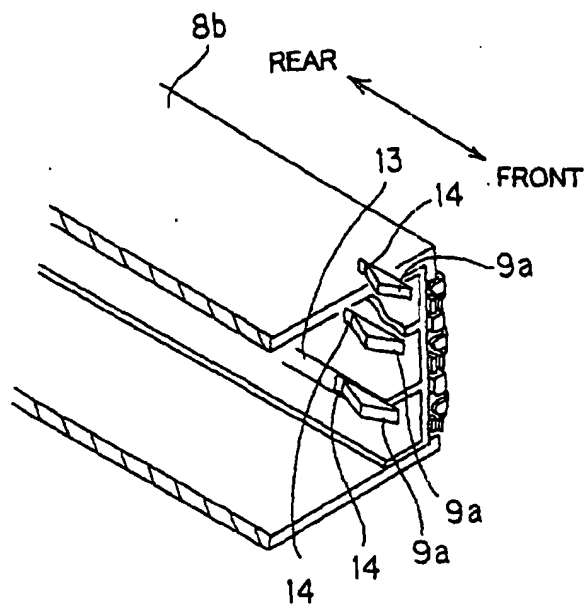


FIG. 6(a)

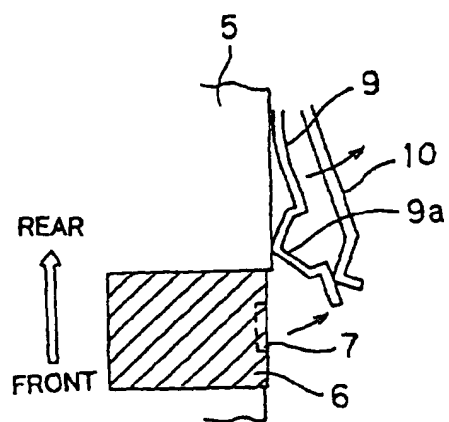


FIG. 6(b)

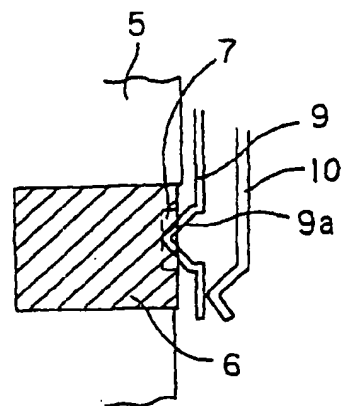


FIG. 7

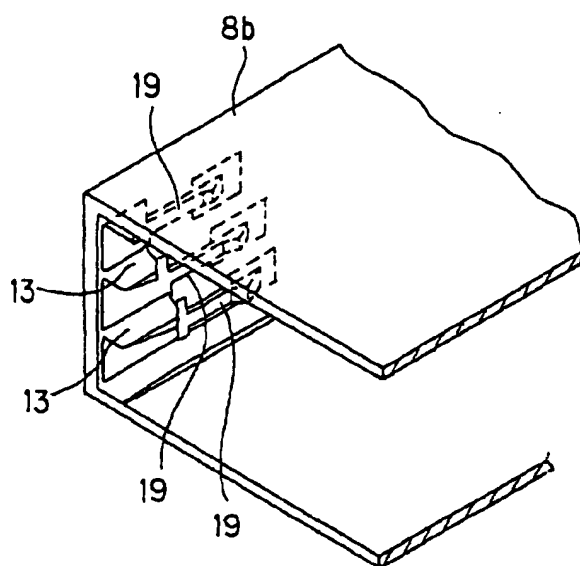


FIG. 8(a)

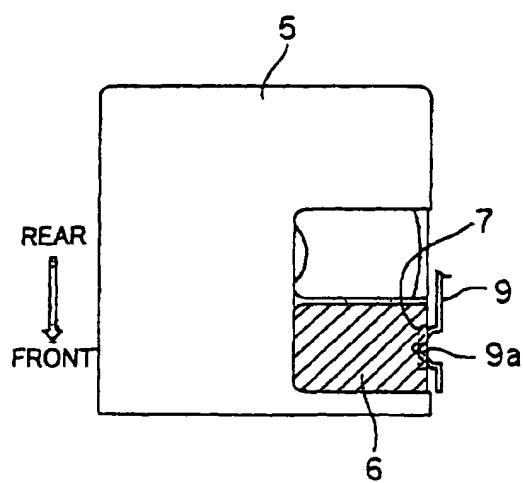


FIG. 8(b)

